

Архангельск (8182)63-90-72  
Астана (7172)727-132  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06

Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35  
Тверь (4822)63-31-35  
Томск (3822)98-41-53  
Тула (4872)74-02-29  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Ярославль (4852)69-52-93

[www.sft.nt-rt.ru](http://www.sft.nt-rt.ru) | | [sfq@nt-rt.ru](mailto:sfq@nt-rt.ru)

# Технические характеристики на компактные никель-кадмиевые батареи СРL, СРМ

# Compact, delivering high-energy performance in a compact maintenance-free package

Compact: guaranteed power continuity for remote or hard to access installations



Compact delivers exceptional reliability to offer effective insurance against unexpected outages for industrial installations where continuity and reliability of power supplies is an absolutely critical factor, such as oil & gas exploration and production, utilities and manufacturing plant. Compact is especially suited for remote and/or decentralized locations where travel time and restricted access demand an optimized maintenance regime and guaranteed performance to ensure quality of service.

Typical Compact applications include supporting vital control and instrumentation systems


in onshore and offshore oil & gas facilities, onboard communication, navigation and emergency lighting on vessels and mobile LCD screens for concerts and sport games.

Compact is also ideally suited for railway signalling and infrastructure applications, for trackside signals, switches, crossing control signals & barriers and other equipment – both to guarantee public safety and ensure the effective control of trains and other traffic on highway crossings.

Compact robust Ni-Cd construction and engineered electrolyte ensure total reliability and a long, predictable service life.

The Compact battery has a Ni-Cd construction designed for more than 20 years' service life at + 25°C (+ 77°F). Like any other battery, high temperature operation will reduce its life expectancy. For comparison, at + 35°C (+ 95°F), the lifetime reduction for a Ni-Cd battery is 20%, while it reaches 50% for a lead-acid battery.

Effect of temperature on lifetime

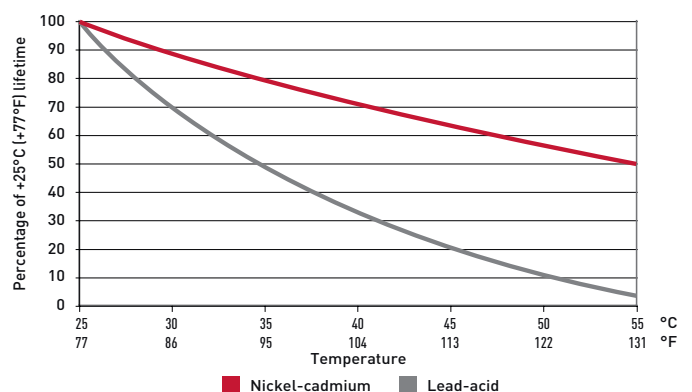

# Compact, perfectly adapted for battery installations in tight spaces

The Compact Ni-Cd battery delivers the optimum combination of high-energy performance, reliability and long-life in a new compact, modular maintenance-free design that ensures the lowest possible TCO (Total Cost of Ownership). Thanks to its outstanding energy density of up to 100 Wh/l, Compact is the perfect direct replacement for VRLA batteries in stationary back-up applications where limited space is available. Compact reduces battery weight by 30% in the same space.

## Reliable backup performance guaranteed – even in extreme temperatures

Compact offers the ideal combination of reliability, performance and long-life over a wide range of operating temperatures.

- Utilizes robust construction based on unique well-proven Ni-Cd electrochemistry
- Eliminates the corrosion, sudden death and thermal runaway risks associated with VRLA batteries
- Combines superior performance with high charging efficiency
- Operates in temperatures from -20°C to +50°C (-4°F to +122°F) and tolerates -50°C to +70°C (-58°F to +158°F) for short durations
- Exceptional reliability removes the need for dual-redundant systems

## Operating and maintenance requirements are reduced – even for remote installations


Compact's reliable maintenance-free design is perfectly adapted for difficult to access installations.

- Maintenance free design, with a low pressure venting system, reduces water consumption to an absolute minimum
- No topping up is necessary (in recommended operation) – water addition is possible under exceptional circumstances
- Periodic checks of charging voltage are recommended, but Compact requires no further attention once installed
- Extended lifetime matches the stationary equipment it supports


## Flexible block configuration

Compact batteries can be assembled either on shelves or into Saft's standard and seismic battery racks. The rack assembly method (with 2 rows of Compact on each step) enables the installation to be optimised in terms of footprint and volume. For series connection on racks or on shelves, a block with an even number of cells should be selected to ensure short, straight, inter-block connectors. If it is necessary to specify a block with an odd number of cells it should be placed at the end of a row.

Block with an odd number of cells  
L(3) - L(5) - L(7) - L(9)



Block with an even number of cells  
L(4) - L(6) - L(8) - L(10)



# Compact, for ease of installation and operation



## A simple and direct replacement

Compact modular design makes Compact the ideal direct replacement for VRLA batteries in backup applications - it fits easily within the available space and is fully compatible with existing equipment.

- Highly compact design optimizes:

- Volume: high energy density of up to 100 Wh/l

- Weight: 30 % lighter than VRLA

- Modular design suits specific capacity needs:

- Compact L range from 83 to 185 Ah and Compact M range from 76 to 180 Ah in modular block construction

- Each module comprises 3 to 10 cells inflame retardant material

- Possibility of many parallel assemblies

- Layout provides easy access to front terminals

- Lifting handles on each module ensure easy handling and installation

- Can be assembled into standard stationary racks

## Designed for ease of operation

Compact offers the ease of operation that contributes to a long and trouble-free service life.


- Compact is compatible with VRLA charging systems thanks to its single step 1.39 V/cell floating voltage, with no need for temperature compensation

- Environmental protection for terminals and connectors is provided by a protection cover (meeting IP20 level against electrical shock according to safety standard

EN 50272-2/IEC 62485-2

- Cabling is carried out from back to, front, with front accessible connection points between adjacent blocks
- Active cooling is not required, even in harsh environments
- Compact batteries may be stored for up to one year without special maintenance before installation

Constant voltage recharge characteristics  
Current limit 0.1 C<sub>5</sub>A - Temperature + 20°C to + 25°C  
(+ 68°F to + 77°F)

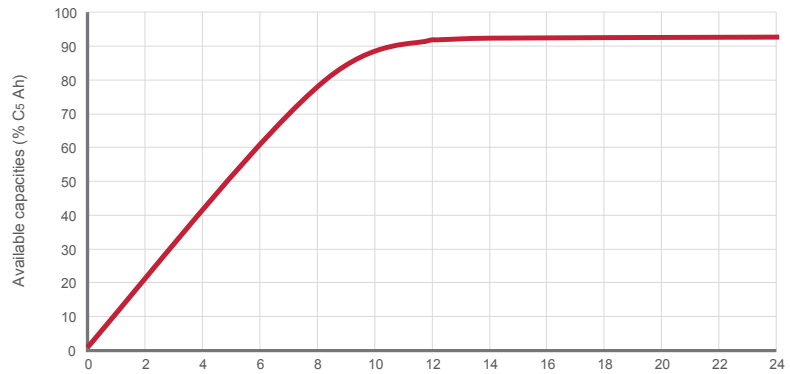

## Compact, the sustainable battery solution

### Designed with sustainability in mind

Compact is purpose designed for minimum environmental impact throughout its entire life cycle, from manufacturing to operation and recycling at end-of-life.

- Compact manufacturing processes are designed to minimize consumption of upstream energy
- In operation, Compact contributes to a significant reduction in energy consumption throughout its service life
- Highly efficient charging reduces peripheral energy consumption, including cabinet air conditioning and maintenance
- Advanced design reduces the environmental impact of waste processing





# Conforms with quality, safety and environmental standards



## Meets the highest international standards including:

### Electrical and performances

- Certified IEC 60623 – vented nickel technology battery
- Certified NF C 15-100 – Low-voltage electrical installations

### Safety

- EN 50272-2/IEC 62485-2 – Safety requirements for secondary batteries and battery installations – Part 2: Stationary batteries
- UL 94 VO: UL standard for flammability safety of plastic materials for parts in devices and appliances testing
- UL 1989: Safety standard for Standby batteries by Intertek

### Quality

- ISO 9001
- world class continuous program

### Environment

- ISO 14001
- Fully recyclable
- RoHS – Although batteries and accumulators are not within the scope of the RoHS directive, has taken voluntary measures to ensure that the substances prohibited by RoHS are not present in the battery, with the exception of the electro-chemical core
- REACH – The Group has adopted internal procedures to ensure conformity with the European REACH (Registration, Evaluation, Authorisation and Restriction of Chemical Substances) Regulation

# Compact L-Type Technical data

## Compact Physical properties L Range

For low rate discharges over long periods between 1 and 100 hours

Cell type	Capacity C5 Ah	Height		Width		Approx. weight per cell		Internal resistance* mOhm	Cell connection bolt per pole
		mm	in	mm	in	kg	lb		
<b>CPL 80</b>	83	254	10	105	4,13	2,2	4,8	2,35	M6
<b>CPL 100</b>	103	254	10	105	4,13	2,7	5,9	1,88	M6
<b>CPL 150</b>	152	254	10	105	4,13	4,1	7,9	1,37	M6
<b>CPL 180</b>	185	254	10	105	4,13	5,1	10,0	1,15	M6

Cell type	Length per block															
	3 cells		4 cells		5 cells		6 cells		7 cells		8 cells		9 cells		10 cells	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
<b>CPL 80</b>	127	5,0	166	6,6	206	8,1	245	9,7	285	11,3	325	12,8	364	14,4	404	15,8
<b>CPL 100</b>	154	6,1	202	8,0	251	10,0	299	11,8	348	13,7	397	15,7	445	17,6	494	19,5
<b>CPL 150</b>	209	8,3	276	10,9	342	13,5	409	16,1	476	18,8	-	-	-	-	-	-
<b>CPL 180</b>	250	9,9	331	13,0	411	16,2	492	19,4	-	-	-	-	-	-	-	-

# Compact M-Type Technical data

## Compact Physical properties M Range

For varied loads with low and high discharge rates, between 30 minutes and 3 hours

Cell type	Capacity C5 Ah	Height		Width		Approx. weight per cell		Internal resistance* mOhm	Cell connection bolt per pole
		mm	in	mm	in	kg	lb		
<b>CPM 80</b>	76	254	10	105	4,13	2,2	4,8	2,35	M6
<b>CPM 100</b>	98	254	10	105	4,13	2,7	5,9	1,88	M6
<b>CPM 150</b>	147	254	10	105	4,13	4,1	7,9	1,37	M6
<b>CPM 180</b>	180	254	10	105	4,13	5,1	10,0	1,15	M6

Cell type	Length per block															
	3 cells		4 cells		5 cells		6 cells		7 cells		8 cells		9 cells		10 cells	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
<b>CPM 80</b>	127	5,0	166	6,6	206	8,1	245	9,7	285	11,3	325	12,8	364	14,4	404	15,8
<b>CPM 100</b>	154	6,1	202	8,0	251	10,0	299	11,8	348	13,7	397	15,7	445	17,6	494	19,5
<b>CPM 150</b>	209	8,3	276	10,9	342	13,5	409	16,1	476	18,8	-	-	-	-	-	-
<b>CPM 180</b>	250	9,9	331	13,0	411	16,2	492	19,4	-	-	-	-	-	-	-	-

We energize  
the world.  
On land,  
at sea,  
in the air  
and in space.

is committed to protecting and preserving the environment. We are engaged in a sustained effort to use resources responsibly and to act in a way that clearly demonstrates our great respect for the planet.

As part of its environmental commitment, gives priority to recycled raw materials over virgin raw materials, reduces its plants' air and water releases year after year, minimizes water usage, reduces fossil energy consumption and associated CO<sub>2</sub> emissions, and ensures that its customers have recycling solutions for their spent batteries.

Regarding industrial batteries, has set up a network of Bring Back Points (BBPs) which receive end-of-life nickel-based batteries from end users free of charge. These batteries are then shipped by these BBPs to our recycling facility in Sweden or to fully permitted recycling companies, in compliance with the laws governing trans-boundary waste shipments.

The recycling efficiency of these recyclers exceeds 75% of the nickel-based battery weight (a level which exceeds the mandated recycling efficiency of 65% applicable to lead-acid batteries), and recycled materials are reused as secondary raw material for industry.

This network of Bring Back Points comprises over 30 entities and provides services in all of our major markets in Europe, North America, Asia and Africa. The list of BBPs and their contact details are available on the website.

Архангельск (8182)63-90-72  
Астана (7172)727-132  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06

Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16

Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35  
Тверь (4822)63-31-35  
Томск (3822)98-41-53  
Тула (4872)74-02-29  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Ярославль (4852)69-52-93

Киргизия (996)312-96-26-47

Россия (495)268-04-70

Казахстан (772)734-952-31